


UV SENSOR TYPE FD1xx - FD2xx

FLAME DETECTION DEVICES FOR FUEL OIL AND GAS BURNERS EMITTING BLUE LIGHT

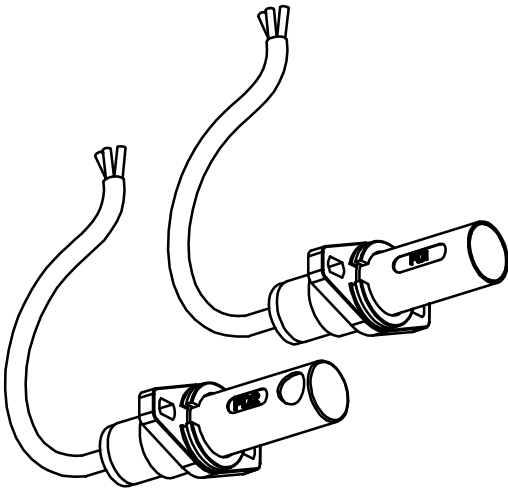

INTRODUCTION

The combustion process, depending on the type of fuel used, emits more or less light radiation belonging to the ultraviolet, visible or infrared spectrum.

Of course, gas oil combustion generates a very bright flame, which is easily detectable by means of sensors using common photocells; nevertheless, at the same time gas oil combustion generates a quantity of substances not completely burnt (unburnt substances), which pollute and also dirty the combustion chamber step by step.

By suitably adjusting the combustion, it is possible to solve this problem and improve the flame quality, making it similar to the flame produced by gas, natural gas or propane combustion (blue flame).

Since photocells are not sensitive to blue flame light, in most gas burners the presence of flame is detected by exploiting the ionization principle; to this purpose, you simply need an electrode (electrically isolated metal rod) suitably "immersed" in the flame. This principle is not easily applicable in oil burners, as the electrode immersed in the flame gets dirty quickly (consequently losing its efficiency) and modifies the turbulence in the combustion chamber, thus creating serious problems.

For all these reasons, it is necessary to detect the presence of flame by means of ultraviolet sensitive detectors.

DESCRIPTION

The FDx sensor uses a silicon preamplified active element, specifically designed for blue flame burner applications; the UV light peak detection of this sensor is around 310 nm.

Thanks to the incorporation of suitable electronic components, this device can be fitted both to the BRAHMA analogical control boxes (for example EUROBOX, EUROFLAT, MINIFLAT, MICROFLAT, EUROGAS, EUROOIL, OIL-SYSTEM series) and to the BRAHMA digital control boxes (for example Digital Microflat, Digital Microflat "N", EUROGAS type VM44G, EUROOIL type VM44O series).

In order to meet the widest range of market requirements, this device is available in the FD1 version (with front view) and in the FD2 version (with lateral view). In application where the flame is far from the point of detection a high sensitivity sensor can be required.

Please note that the FDx detector is sensitive to the ultraviolet component of visible light; therefore, its use is recommended in burners fitted with closed combustion chambers and in an application environment perfectly shielded from visible light.

FEATURES

- Supply voltage	220-240V/50-60Hz
- Power consumption	1VA
- Visible band	290-350nm
- Reception angle	8°
- Max. output current	500µA
- Operating temperature range	-20 to +60°C
- Max. humidity	95%

SENSORS DENOMINATIONS

Type

FD (a) (b) (c)

Type description

- (a) **Kind of view**
1: front view
2: lateral view
- (b) **Kind of BRAHMA control box connected with the sensor**
/N: analogical BRAHMA control boxes (ex. Serie Microflat, Euroflat, OIL-SYSTEM, ...)
D: digital BRAHMA control boxes (ex. Digital Microflat, EUROGAS type VM44G, ...)
- (c) **Sensitivity**
No letter: standard sensitività
H: high sensitività

Examples of denominations:

- 1) FD1DH: sensor with front view, used with digital BRAHMA control boxes, with an high sensitivity.
- 2) FD2/N: sensor with lateral view, used with analogical BRAHMA control boxes.

ATTENTION -> Company Brahma S.p.A. declines any responsibility for any damage resulting from the Customer's interfering with the device

BRAHMA S.p.A.

Via del Pontiere, 31
37045 Legnago (VR)
Tel. +39 0442 635211 - Telefax +39 0442 25683
<http://www.brahma.it>
E-mail : brahma@brahma.it

08/07/16 Subject to amendments without notice